

High-Sided Gondola featuring Ultra-High-Strength Steel™

The 52'-6" mill gondola railcar, featuring fixed ends, is built to meet AAR M-1001 specifications. Utilizing an innovative formula for steel, these gondolas achieve a reduction in unloaded weight by up to 13,000 pounds.



THE GREENBRIER COMPANIES
One Centerpoint Drive, Suite 200
Lake Oswego, Oregon 97035

info@gbrx.com

GENERAL DIMENSIONS (APPROX.)


| | |
|------------------------|-------------|
| Overall length, inside | 52'-6 ¼" |
| Length, over couplers | 57'-11 ½" |
| Width, inside | 9'-4" |
| Width, extreme | 10'-6 5/8" |
| Height, inside | 8'-8" |
| Height, extreme | 12'-4 ¼" |
| Clearance | AAR PLATE C |

WEIGHT/CAPACITY (EST.)

| | |
|-----------------|---------------|
| Light weight | 62,200 lbs. |
| Load limit | 223,800 lbs. |
| Gross rail load | 286,000 lbs. |
| Capacity, net | 4,230 cu. ft. |

CURVE NEGOTIABILITY RADIUS

| | |
|---------------------|------|
| Uncoupled | 150' |
| Coupled to base car | 216' |
| Coupled to like car | 218' |

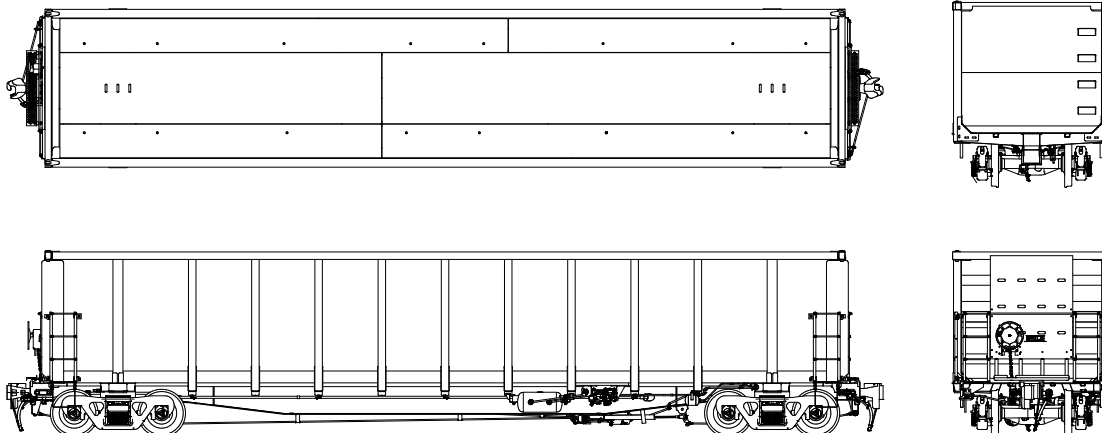

These general dimensions are representative and subject to change without notice.