

## 62' Bulkhead Flatcar

This 62' bulkhead flatcar is designed with nailable steel flooring and 15-inch end-of-car cushioning. Bulkheads are 11'-8" high above the nailable steel flooring and come equipped with treated Douglas Fir planks treated per American Wood Preservers Association (AWPA) Standard C-15. The design offers flexibility to carry a variety of products.



**THE GREENBRIER COMPANIES**

One Centerpoint Drive, Suite 200  
Lake Oswego, Oregon 97035

info@gbrx.com

**GENERAL DIMENSIONS (APPROX.)**


Length, inside	<b>62'</b>
Length, over couplers	<b>73'-5½"</b>
Height, Top of Rail to Threshold Clearance	<b>3'-8 1/8"</b>
	<b>AAR PLATE C</b>
Width, inside	<b>8'-4"</b>
Width, extreme	<b>10'-5"</b>

**WEIGHT/CAPACITY (EST.)**

Light weight	<b>83,500 lbs.</b>
Load limit	<b>202,500 lbs.</b>
Gross rail load	<b>286,000 lbs.</b>

**CURVE NEGOTIABILITY RADIUS**

Uncoupled	<b>180'</b>
Coupled to base car	<b>203'</b>
Coupled to like car	<b>143'</b>

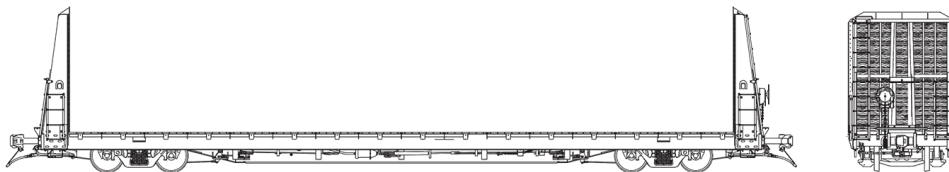

*These general dimensions are representative and subject to change without notice.*